




Power Sequencer

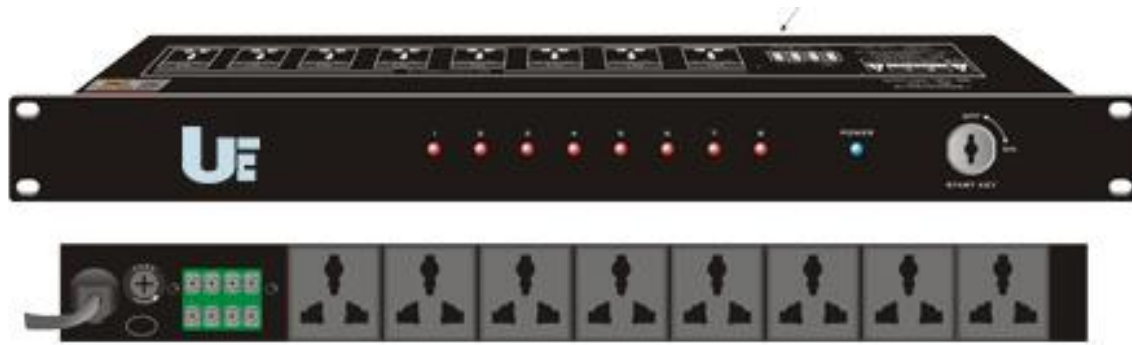

8 Channel Power Sequencer - IAVTC21	
Ports	Power Port x 8, built in 9 voltage driven isolated digital inputs
Switches	Programmable Definition of Various Logic Switches Supported
Controlling Data Interface	Standard RS232 data interface and open control protocol supported
Output Power	10 Amps incandescent, 5Amps fluorescent, 0.5 HP at 120 to 240 Volts AC, 50/60 Hz, 5Amps at 30 Volts DC; 16 Amps Resistive
Total Module Supported	80 Amps Incandescent and 40 Amps fluorescent @ 120-240 Volts AC, 50/60 Hz
Feature	Capable of communicating with central control system, addressable unit for multiple units

Product image(s) are for illustrative purposes only and may differ from the actual product.



UNIVERSAL ENTERPRISES

Mangal Parao, Haldwani (Uttarakhand)
Ph.: 05946-255434, Fax: 05946-252300
Email: universalenterprises111@gmail.com