




LED Display Wall



Low Maintenance & Power Saving

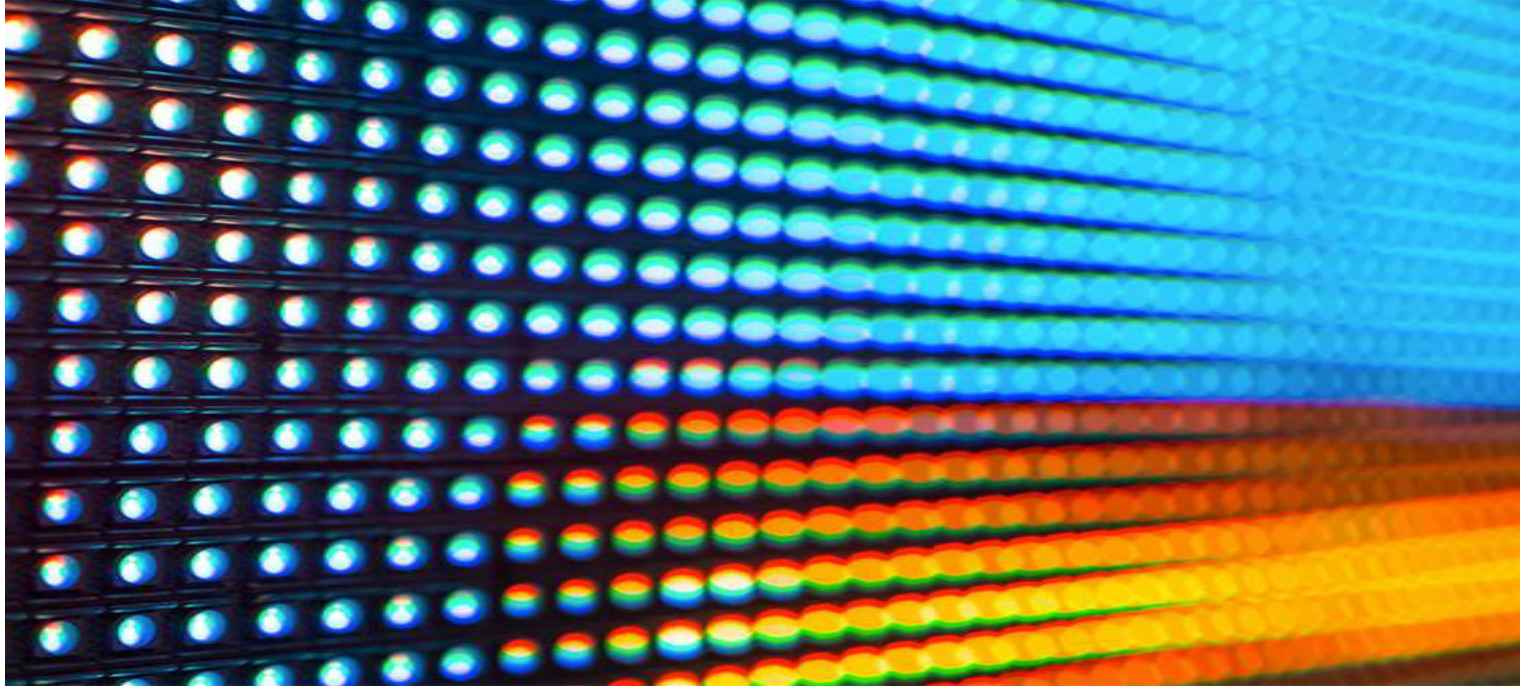

Uniform Brightness and Colours



Bezel-Less Viewing Experience



Wide Viewing Angles

Product image(s) are for illustrative purposes only and may differ from the actual product



UNIVERSAL ENTERPRISES

Mangal Parao, Haldwani (Uttarakhand)
Ph.: 05946-255434, Fax: 05946-252300
Email: universalerprises111@gmail.com

LED Display Wall – UP-IP-9A	
Environment	Indoor
Pixel Pitch	1.25 mm
Maintenance	Front/Rear
Module Composition	W 4 x H 1
Brightness	1000 cd/m ²
Brightness Control	Manual/Automatic
Colour Temperature	3000-10000 K
Viewing Distance	≥1.25 m
Pixel Density	640000 pixels / m ²
LED Luminance Centre	≤3%
High Dynamic Range	Supported
LED Type	3-in-1 Black Chip on Board
Pixel Configuration	1 Red, 1 Green, 1 Blue
Contrast Ratio	8000:1
Drive Mode	Constant Current Drive
Chromaticity Uniformity	±0.003 Cx, Cy
Processing Depth/ Grey Scale	14~16 bit
Operating Temperature	0 degree C ~ 40 degree C
Acoustic Noise	Fan less operation
Refresh Rate	≥ 3840 Hz
Brightness Uniformity	≥97 %
Viewing Angle	H: 160 degree; V:140 degree
Pixels Per Panel	W 480 x H 270 Dots
Flat Surface	≤0.3 mm
Material	Aluminium Alloy Cabinet
Operating Humidity	10~90%RH
Video Frame Rate	50/60Hz
installation mechanism	Easy Maintenance, self-locking mechanism for easy & fast installation, Automatic Alignment Mechanism,
Input Voltage	100-240V AC
Input Power Frequency	50~60Hz
Power Consumption	600W ; 200W(max; avg)/m ²
Rigging Form	Hanging/Fixed
Gap Between Modules	Seamless, zero bezel width
LED Life Time	≥100,000 Hours
Data Interconnection	CAT5/ CAT6 Cable (L≤100m); Multi-mode fiber (L≤300m)
LED wall Size	W 4200 mm x H 1685 mm
Special Feature	Automatic 6-Axis Alignment Mechanism with Front or Rear Maintenance cabinet, Floating Connector, Status indicators and button are in the main frame of the cabinet structure, and can be accessed from both front and back, HDR Ready, Resistant to torsion and shock; Generic Cables (Concise appearance, off the shelf power and signal, ensuring the stable and reliable quality), Highly Modular

Product image(s) are for illustrative purposes only and may differ from the actual product



UNIVERSAL ENTERPRISES

Mangal Parao, Haldwani (Uttarakhand)
 Ph.: 05946-255434, Fax: 05946-252300
 Email: universalenterprises111@gmail.com